

6-port Full Gigabit Industrial PoE Switch

- 4*10/100/1000Base-T RJ45 ports and 2*10/100/1000Base-T uplink RJ45 ports, port 1-4 can support PoE.
- The uplink RJ45 ports can be transmitted and cascaded, and the connection is more convenient.
- Dual power supply input , DC input: 48V-57V, 6KV port lightning protection,
- -40°C—+80°C operation temperature
- Large cache military-level master chip configuration, IP40 protection aluminum alloy case, 5-year warranty.



OVERVIEW

The IND-D-U-FG-0600-P series is a full gigabit industrial PoE switch. It has 6*10/100/1000Base-T RJ45 ports. Port 1-4 can support IEEE 802.3af/at PoE standard, single-port PoE power up to 30W, and the maximum PoE output power of the host is 60W (at-120W). As a PoE power supply device, it can automatically detect and recognize the power receiving equipment that meets the standard and supply power through the network cable. It can supply power to PoE terminal device such as wireless AP, IP camera, industrial sensor through the network cable, and meet the network environment that needs high-density PoE power supply. It is suitable for intelligent transportation, rail transit, power industry, mining, petroleum, sea transportation. Industrial scenes such as metallurgy and green energy construction form a cost-effective, stable and reliable communication network.

FEATURE

■ Gigabit wire speed forwarding,


- ◇ All series supports full gigabit Ethernet ports, high speed and high bandwidth connection to meet the needs of various scenarios.
- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE802.3x and half-duplex based on backpressure.

■ Powerful port lightning protection, wide voltage input

- ◇ Contact discharge 8KV, air discharge 15KV; port lightning protection common-mode 4KV, differential mode 2KV;
- ◇ Industrial dual power input
- ◇ DC INPUT: 48V-57V, non-PoE DC INPUT: 12-48V.



lightning protection design

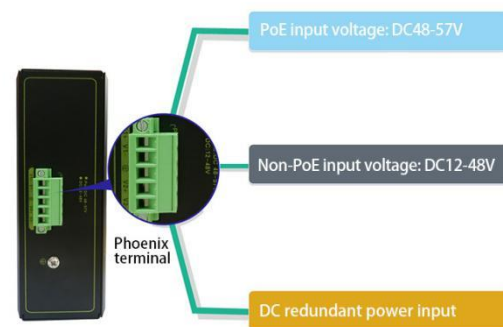

Dual power redundancy input

■ Intelligent PoE power supply

- ◇ 4*10/100/1000Base-T RJ45 ports, meeting the needs of security monitoring, teleconferencing system, wireless coverage, and other scenarios.

- ◇ IEEE 802.3af/at PoE standard, without damaging non-PoE devices.
- ◇ Priority system for PoE port, it will supply power to the high priority level port first when the power budget is insufficient and avoid overwork of the device.

■ Stable and reliable

- ◇ Low power consumption, No fan, aluminum casing.
- ◇ CCC, CE, FCC, RoHS.
- ◇ The user-friendly panel, it can show the device status through the LED indicator of PWR, SYS, Link, L/A, PoE.


TECHNICAL SPECIFICATION

Model	IND-D-U-FG-0600-P	IND-D-U-FG-0600-P-at
Interface Characteristics		
Fixed Port	4*10/100/1000Base-T PoE ports (Data/Power) 2*10/100/1000Base-T uplink RJ45 ports(Data) 2 set of V+, V- redundant DC power interface (5P Phoenix terminal)	
Ethernet Port	Port 1-6 support 10/100Base-TX,auto-sensing, Full/half duplex MDI/MDI-X self-adaption	
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP(≤100 meter) 100BASE-TX: Cat5 or later UTP(≤100 meter) 1000BASE-T: Cat5e or later UTP(≤100 meter)	
Chip Parameter		
Network Protocol	IEEE802.3 10BASE-T, IEEE802.3i 10Base-T, IEEE802.3u 100Base-TX,IEEE802.3ab 1000Base-T IEEE802.3x	
Forwarding Mode	Store and Forward(Full Wire Speed)	
Switching Capacity	16Gbps	

Forwarding Rate@64byte	8.93Mpps	
MAC	8K	
Buffer Memory	2M	
Jumbo Frame	9.2K	
LED Indicator	Power: PWR (green), network ;Link, Link/A ct (yellow), POE: PoE (green), speed: SPD (green)	
PoE & Power		
PoE Port	Port 1 to 4 IEEE802.3af/at @ POE	
Power Supply Pin	Defaul :1/2 (+), 3/6 (-),optional:4/5 (+), 7/8 (-)	
Max Power Per Port	30W; IEEE802.3af/at	
Total PWR / Input Voltage	60W/48VDC	120W/48VDC
Power Consumption	Standby:<5W;Full load:<60W	Standby:<6W;Full load:<120W
Power Supply	No, optional 48V/60W or 48V/120W industrial power supply	
Working Voltage	48-57VDC; 5P industrial Phoenix terminal, support anti-reverse protection.	
Physical Parameter		
Operation TEMP / Humidity	-40~+80°C;5%~90% RH Non condensing	
Storage TEMP / Humidity	-40~+85°C;5%~95% RH Non condensing	
Dimension (L*W*H)	119*100*30mm	
Net /Gross Weight	<0.6kg / <0.8 kg	
Installation	Desktop, DIN rail	
Certification & Warranty		


Lightning protection / protection level	Lightning protection: 6KV 8/20us; Protection level: IP40 IEC61000-4-2(ESD):±8kV contact discharge,±15kV air discharge IEC61000-4-3(RS):10V/m(80~1000MHz) IEC61000-4-4(EFT): power cable:±4kV; data cable:±2kV IEC61000-4-5(Surge):power cable:CM±4kV/DM±2kV; data cable:±4kV IEC61000-4-6(radio frequency transmission):10V(150kHz~80MHz) IEC61000-4-8(power frequency magnetic field):100A/m;1000A/m ,1s to 3s IEC61000-4-9(pulsed magnet field):1000A/m IEC61000-4-10(damped oscillation):30A/m 1MHz IEC61000-4-12/18(shockwave):CM 2.5kV,DM 1kV IEC61000-4-16(common-mode transmission):30V; 300V,1s FCC Part 15/CISPR22(EN55022):Class A IEC61000-6-2(Common Industrial Standard)
Mechanical Properties	IEC60068-2-6 (anti vibration) IEC60068-2-27 (anti shock) IEC60068-2-32 (free fall)
Certification	CCC;CE mark, commercial; CE/LVD EN60950;FCC Part 15 Class B; RoHS;
Warranty	5 years , lifelong maintenance.

DIMENSION

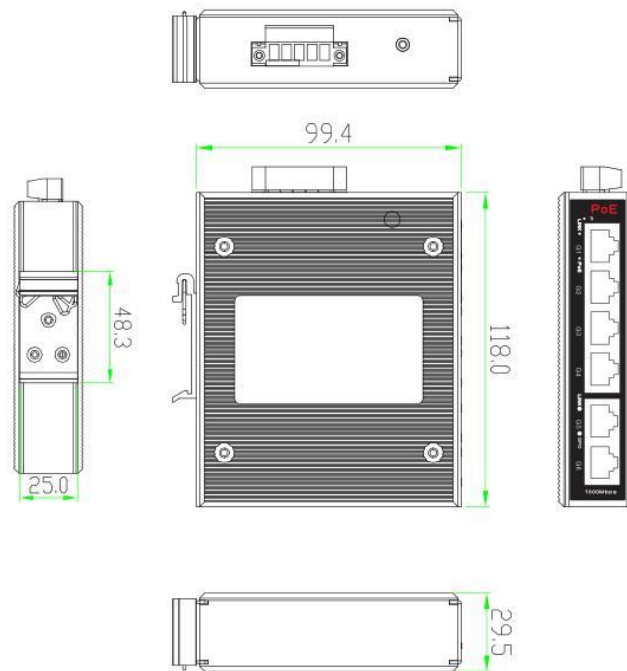

APPLICATION

1. Network Topology

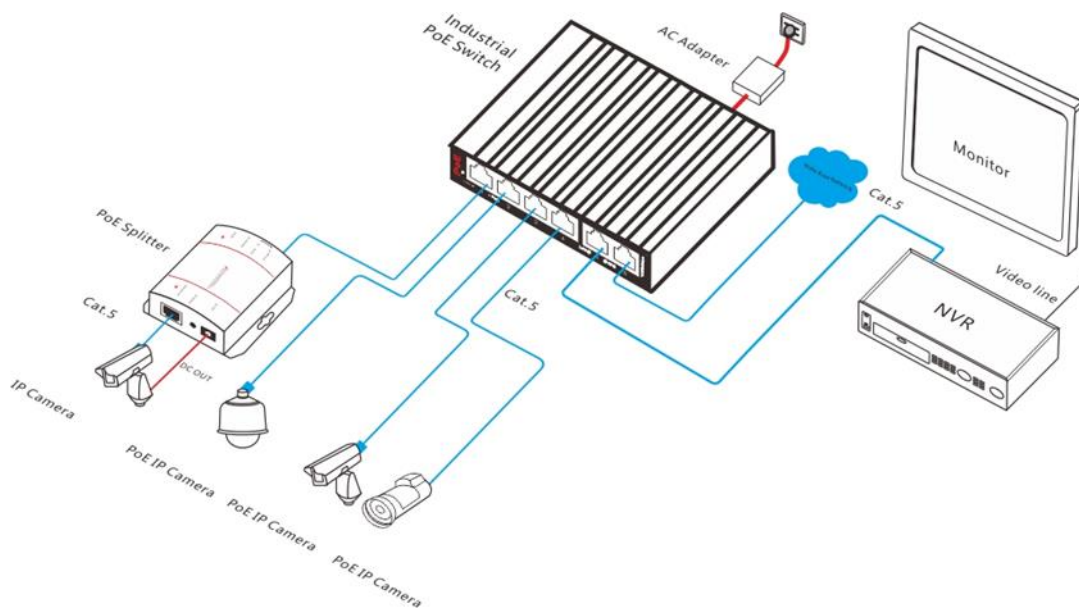

ORDERING INFORMATION

Model	Description	Recommended power supply
IND-D-U-FG-0600-P	Unmanaged industrial PoE switch with 6*10/100/1000M RJ45 ports , Port 1-4 can support IEEE802.3af/at PoE standard. Support DC dual power supply input and DIN rail mounting.	60W
IND-D-U-FG-0600-P-at		120W
Note: Industrial PoE switch does not match the power supply.		

PACKING LIST

	CONTENT	QTY	UNIT
PACKING LIST	6-port full gigabit industrial PoE switch	1	SET
	User Guide	1	PC
	Warranty Card	1	PC

POWER SUPPLY SELECTION TABLE

Product	Model	Description	Unit
65W Desktop Power Adaptor	AP65-52	Desktop tape 65W single set of output power adapter; Input Voltage:AC 100V~240V 50-60Hz,1.1A Output Voltage:DC 52V 1.25A Operation Temperature:-20℃—+65℃	PC
110W Desktop Power Adaptor	AP110-52	Desktop tape 110W single set of output power adapter; Input Voltage:AC 100V~240V 50-60Hz,2.0A Output Voltage:DC 52V 2.0A Operation Temperature:-20℃—+65℃	PC
60W DIN Rail	DP60-48	Din Rail type 60W single set of output	PC

Industrial Power Supply		power supply; Input Voltage:AC 100V~240V 50-60Hz, 1A Output Voltage:DC 48V 1.25A Operation Temperature:-40°C—+70°C	
120W DIN Rail Industrial Power Supply	DP120-48	Din Rail type 120W single set of output power supply; Input Voltage:AC 100V~240V 50-60Hz, 1.5A Output Voltage:DC 48V 2.5A Operation Temperature:-40°C—+70°C	PC

RELATED PRODUCT

Model	Description
IND-D-U-FG-0402-P	Unmanaged industrial PoE fiber switch with 4*10/100/1000M RJ45 ports and 2*1000M SFP slot ports, Port 1-4 can support IEEE802.3af/at PoE standard. Support DC dual power supply input and DIN rail mounting.
IND-D-U-FG-0501-P	Unmanaged industrial PoE fiber switch with 5*10/100/1000M RJ45 ports and 1*1000M SFP slot port, Port 1-4 can support IEEE802.3af/at PoE standard. Support DC dual power supply input and DIN rail mounting.
IND-D-U-FG-1000-P	Unmanaged industrial PoE switch with 10*10/100/1000M RJ45 ports, Port 1-8 can support IEEE802.3af/at PoE standard. Support DC dual power supply input and DIN rail mounting.
IND-D-U-FG-0802-P	Unmanaged industrial PoE fiber switch with 8*10/100/1000M RJ45 ports and 2*1000M SFP slot port, Port 1-8 can support IEEE802.3af/at PoE standard. Support DC dual power supply input and DIN rail mounting.
IND-D-U-FG-1002-P	Unmanaged industrial PoE fiber switch with 10*10/100/1000M RJ45 ports and 2*1000M SFP slot ports, Port 1-8 can support IEEE802.3af/at PoE standard. Support DC dual power supply input and DIN rail mounting.



CONTACT US

AUTOMATION SYSTEMS & SOLUTION

📍 **Address:** T-12, 3rd Floor, Pankaj Central Market, I.P. Extension,
Patparganj, **Delhi – 110092**

☎ **Tel:** +91 11 41709077 / 22232187

✉ **Email:** infoautomation18@gmail.com

Website: www.automationsystem.in